


GENERAL INFORMATION.

The "MONOBLOC" Carburetters are supplied with or without an air valve. If an air valve is required it can be supplied suitable for operation by a cable and lever from the handle bar or by a rod on the carburetter itself. The standard range of float chamber banjo connections available are as follows:

- Banjo Part No. 375/068. Single feed for $\frac{3}{16}$ " bore flexible pipe.
 Banjo Part No. 376/090. Single feed, screwed $\frac{1}{4}$ " B.S.P., complete with nut and nipple for copper pipe.
 Banjo Part No. 376/097. Single feed for $\frac{1}{4}$ " bore flexible pipe.
 Banjo Part No. 376/098. Double feed for $\frac{1}{4}$ " bore flexible pipes.
 Banjo Part No. 376/108. Double feed, screwed $\frac{1}{4}$ " B.S.P., complete with nuts and nipples for copper pipes

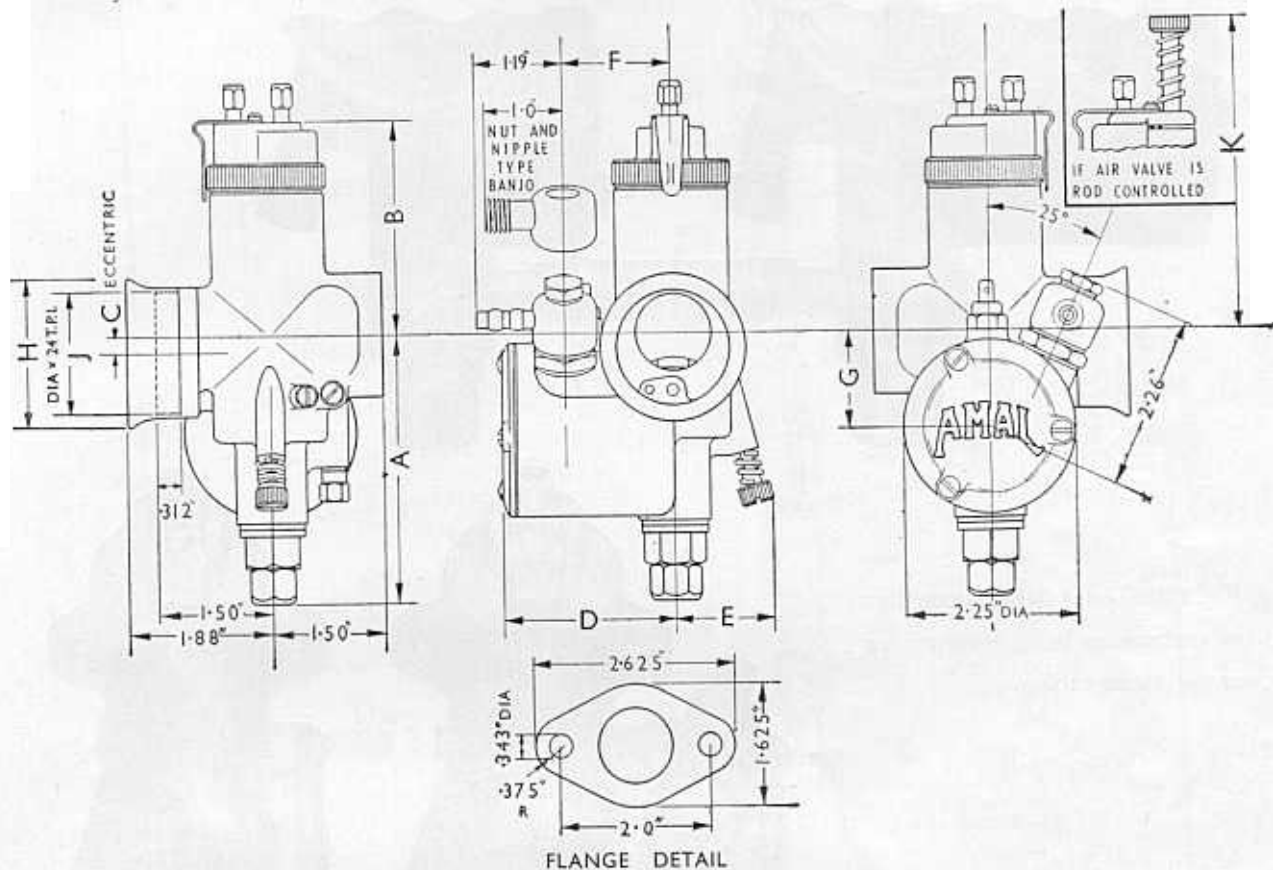

DIMENSIONS OF CARBURETTER

| Type Number | A | B | C | D | E | F | G | H | J | K | Available with Cross Bore Sizes |
|-------------|--------------|--------------|--------------|--------------|--------------|--------------|---------------|---------------|---------------|--------------|--|
| 375 | ins. 3.29 | ins. 2.50 | ins. .156 | ins. 2.18 | ins. 1.21 | ins. 1.34 | ins. 1.146 | ins. 2.062 | ins. 1.437 | ins. 3.93 | $\frac{21}{64}$ in. (16.7 m/m.) $\frac{1}{2}$ in. (18.3 m/m.) $\frac{3}{8}$ in. (19.8 m/m.) $\frac{13}{32}$ in. (20.6 m/m.) $\frac{7}{16}$ in. (22.2 m/m.) |
| 376 | ins. 3.39 | ins. 2.78 | ins. .187 | ins. 2.27 | ins. 1.31 | ins. 1.44 | ins. 1.25 | ins. 1.94 | ins. 1.625 | ins. 4.38 | $\frac{13}{16}$ in. (23.8 m/m.) $1 \frac{1}{8}$ in. (25.4 m/m.) $1 \frac{1}{16}$ in. (27.0 m/m.) |
| 389 | ins. 3.53 | ins. 2.97 | ins. .187 | ins. 2.33 | ins. 1.37 | ins. 1.50 | ins. 1.39 | ins. 2.062 | ins. 1.75 | ins. 4.70 | $1 \frac{1}{8}$ in. (28.6 m/m.) $1 \frac{3}{8}$ in. (29.4 m/m.) $1 \frac{5}{16}$ in. (30.2 m/m.) |