
DIMENSIONS AND SPECIFICATIONS.

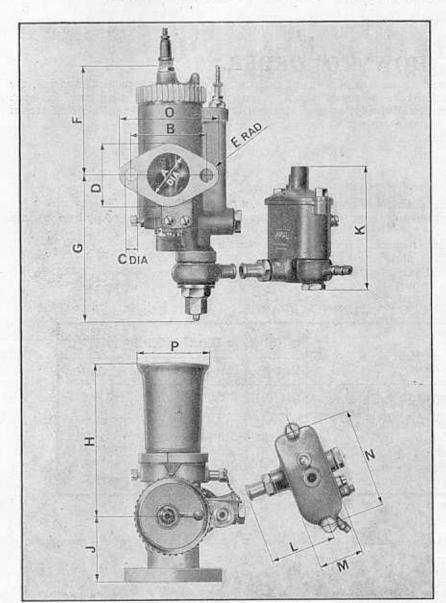

MATERIAL.

Light metal Mixing Chamber and Float Chamber Bodies.

FINISH.

Bodies sprayed with durable and attractive metallic lacquer. Mixing Chamber Cap, plated and polished.

LOCKING DEVICES.

Spring blade lock to engage with serrations in Mixing Chamber Cap. Banjo Bolt, Jet Base Nut, Choke Adaptor Holding Screws, Float Chamber Cover, Fixing Screws and Float Hinge Spindle Head are drilled for lock wires.

ALTERNA	TIVE CLIP FITTING
15GP	11" to 11"
10GP	1¼" to 1¾"
5GP	1 % to 1 11 "
3GP	

Түрк	Available Cross Bores A Dia.	В	С	D	E	F	G	Н	J	К	L	М	N	0	P
15G.P.	ins. 1, 45, 1, 1, 16*	2 ins.	ins.	ins. 15	ins.	ins. 21	ins.	ins. 3 📆	ins. 11 or 21	ins. 3 11 3 22	ins. 13	ins. 1 📆	ins. 2 辑	ins. 24	ins.
10G.P.	$\begin{array}{c} 1_{\frac{1}{16}}, 1_{\frac{3}{32}}, 1_{\frac{1}{8}}, \\ 1_{\frac{3}{32}}, 1_{\frac{1}{16}}, 1_{\frac{2}{33}}* \end{array}$	2 ins. or 65 mm.	11	1 8	3	2 15	3 #	3 👬	1‡ or 2½	3 11	17	1 7 32	2 捌	25	2
ōG.P.	$1\frac{7}{20}, 1\frac{1}{4}, 1\frac{9}{20}, 1\frac{1}{3}$, $1\frac{1}{4}$, $1\frac{1}{3}$ *	65 mm.	皷	2 1	\$72	3 7	4 1/2	3 22	12 or 21	3 11	14	1 %	2 11	3 11	21
3G.P.	13, 13, 14, 14,	65 mm.	11 51	$2\frac{1}{16}$	12	33	4 %	3 11	2	3 11	14	1 7	2 33	3 11	21

*Straight-through Bore with no swell.